

MADE BY



IT'S TIME FOR A REVOLUTION



ZEVO MAX II

SUPERIOR CLIMATE CONTROL
FOR PROFESSIONAL INDOOR GROW ENVIRONMENTS



THE MOST STABLE
CLIMATE THINKABLE.
GUARANTEED.

STEADY-STATE CLIMATE SIMULTANEOUS COOLING, HEATING, DEHUMIDIFICATION & AIRFLOW – SEAMLESSLY CONTROLLED. THAT'S COOL!



TEMPERATURE & HUMIDITY IN ONE
One System, One Control



UNMATCHED CLIMATE STABILITY
No temperature or humidity swings



SCALABLE & ADAPTABLE
Fits any grow environment, small to large scale

The RevomaxII is the all-in-one solution for a perfectly regulated indoor climate. With simultaneous, precise control over temperature and humidity, it eliminates fluctuations and ensures a perfectly balanced environment. Its scalable and flexible design fits any grow setup, from small to large. As a true revolution in climate control, the Revomax sets a new standard for efficiency, reliability, and optimal growth.

REVOMAX II

A stable and precisely regulated climate is essential for successful indoor cultivation. The RevomaxII, equipped with our advanced Infinity DC inverter technology, offers the widest capacity range among all climate control systems. Unlike conventional HVAC units that cannot operate below 60%, the RevomaxII modulates cooling capacity down to 20-30%, preventing unnecessary on-off cycles. This ensures minimal temperature and humidity fluctuations, optimized energy efficiency, and a consistently ideal growing environment—365 days a year.


MINIMUM COOLING CAPACITY (%) - LOWER IS BETTER



LINEAR DEHUMIDIFICATION TECHNOLOGY

A standard HVAC unit cannot regulate humidity, resulting in large humidity fluctuations. With the RevomaxII, deviations are limited to a maximum of only 4% RH*, ensuring constant humidity and eliminating swings. (fig 1)


NO HUMIDITY SWING (FIG 1)

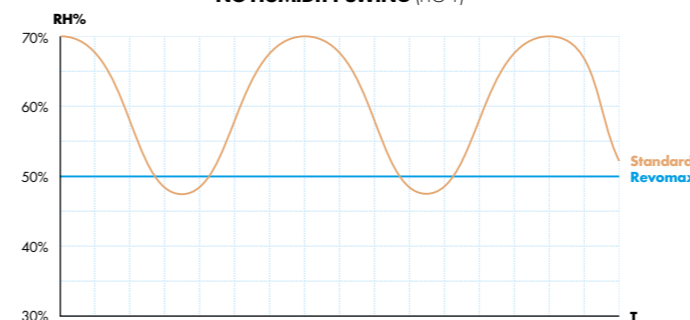

ADVANCED STEADY-STATE TEMPERATURE & HUMIDITY CONTROL


The temperature remains stable with no fluctuations, consistently staying within $\pm 0.2^\circ\text{C}$ of the setpoint (Fig 2).

STEADY STATE CONSTANT TEMPERATURE (FIG 2)

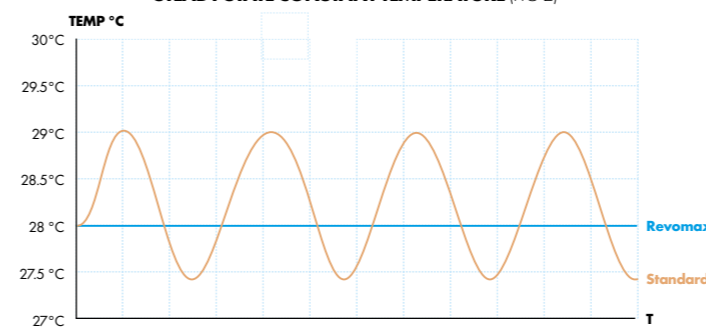

In standard setups where temperature and humidity are managed separately—often with a dedicated HVAC unit along with a separate dehumidifier—output temperature can fluctuate between 10°C and 40°C , depending on indoor conditions. The RevomaxII eliminates these swings by maintaining a stable output temperature within $\pm 0.2^\circ\text{C}$ of the setpoint, ensuring a controlled environment. This is crucial for many plant species, such as leafy greens and herbs, where temperature fluctuations can cause stress. With this advanced stability, the RevomaxII supports a wider range of applications and crops, optimizing growth conditions year-round. (Fig 3)

SUPPLY OUTPUT TEMPERATURE (FIG 3)

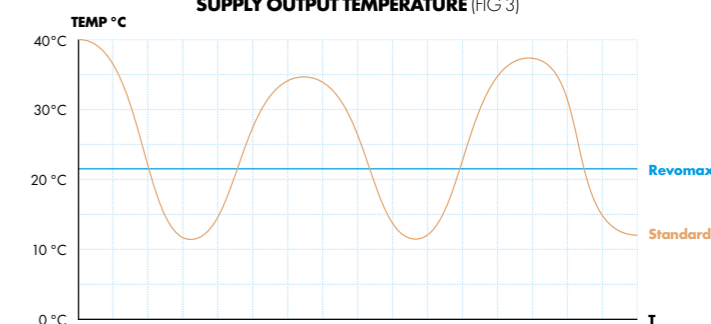

The ultra-precise, simultaneous control of temperature and humidity is made possible by our patented double EEV technology—exclusive to RevomaxII. This sets a new standard in climate stability and flexibility, ensuring unmatched controllability for any growing environment.

OPTIMIZED FOR LED GROWING – FASTER WARM-UP, MAXIMUM PHOTOSYNTHESIS

The RevomaxII is specifically designed for LED growing environments. When LEDs are switched on, the room temperature rises gradually, which can slow down optimal photosynthesis. RevomaxII solves this by using its DC compressor in heating mode, rapidly bringing the room to the ideal temperature without external electrical heaters. This ensures plants reach peak photosynthesis as quickly as possible. Meanwhile, the dehumidification process remains active, keeping humidity perfectly controlled during heating.

**THE MOST STABLE
CLIMATE THINKABLE.
GUARANTEED.**

* Assuming sufficient humidity is present for dehumidification.



FULL CONTROL & MONITORING

The 7-inch Smart Remote Controller comes standard and can be operated via WiFi, LAN & Anydesk. Easily adjust settings, monitor performance and receive notifications for errors or alarms.



1 UNIT 2 COOLING OPTIONS

The RevomaxII is a fully water-cooled climate control system, ensuring efficient, stable, and energy-saving operation without the limitations of air-cooled alternatives. It offers two configurations: a closed-loop system, which recirculates water for maximum efficiency and minimal waste, and an open-loop system, which uses a continuous water source for cooling. For an optimized setup, the Revomax can be seamlessly combined with a perfectly matched RevomaxII water cooler, ensuring maximum performance and reliability.

REVOMAX II

BY OPTICLIMATE

The RevomaxII is a climate control system developed entirely on the company's own premises. This resulted in a completely optimised and efficient product which enables the climate to be adjusted to perfection while consuming as little energy as possible.

The RevomaxII is the only true all-in-one solution for indoor climate management, uniquely designed to simultaneously cool or heat, dehumidify, and circulate air. No longer dependent on outside temperatures, it ensures a perfect, stable climate year-round—even during extreme heat waves. By optimizing air distribution throughout the grow room, it maintains a consistent temperature, precisely adjusted to your settings and continuously regulated for optimal growing conditions.

ENHANCED AIR QUALITY & SUPERIOR HUMIDITY CONTROL

Humidity is present in every environment and can negatively impact both productivity and plant health. Excess moisture can lead to mold, rot, rust, musty odors, dust mites, and allergies, making humidity control essential for an optimal indoor climate. The RevomaxII ensures precise humidity regulation, even under extreme conditions.

Unlike other water-cooled HVAC systems, which dehumidify only during cooling cycles, the RevomaxII continues to dehumidify even after the target temperature is reached. This unique capability prevents excessive atmospheric humidity, ensuring a stable, controlled growing environment where plants can thrive.

PROVEN, OFF-THE-SHELF SOLUTION – EASY INSTALLATION & MINIMAL RISK

The RevomaxII is a standard, off-the-shelf solution, making it easy to install for any experienced HVAC installer without the need for extensive engineering or high upfront design costs—unlike large-scale custom-built systems. Its proven track record in numerous indoor farms ensures reliability and minimizes risk. With a tailor-made solution, there's always uncertainty about its effectiveness in a real-world setting, as it's the first time it's being implemented. The RevomaxII eliminates that uncertainty, providing a trusted, field-tested climate solution from day one.

MOST SAFE SYSTEM

The RevomaxII system has all kinds of built-in functions that ensures its superior climate control.



The **built-in temperature protection** disconnects heat sources when the set maximum temperature is exceeded. E.g. when the water supply is obstructed. A fire could occur without this device.



If the water sensor comes into contact with the water, the **built-in water leak safeguard** ensures the water supply is cut off. This may occur, in the event of a burst pipe, broken link or connection, or a blocked sewer.



The RevomaxII is **fireproof**; all of the electrical components including the heating and connections are contained in the steel housing.



The RevomaxII has an **alarm outlet for sending an e-mail in the event of an error message**. The RevomaxII has a built in remote control feature made possible by WIFI or LAN.



**THE MOST STABLE
CLIMATE THINKABLE.
GUARANTEED.**





REVOMAX II FREE AIR

BY OPTICLIMATE



Where the RevomaxII is made to distribute the air through a ducting system or air distribution hoses, the RevomaxII Free Air is made to blow it out freely. The RevomaxII Free Air is designed in such a way that it takes up as little volume as possible and thus takes up as little space as possible and at the same time intercepts as little light as possible.

The specialized fans have a reach of up to 30m, allowing the Free Air models to be mounted on the grow room wall. This enables climate control without the need for air distribution hoses above the crop.

All the features that the RevomaxII has are also available for the Free Air version.



WHY CHOOSE REVOMAXII BY OPTICLIMATE?



- Digital inverter technology, widest capacity range 30-100%
- Intelligent steady state temperature and humidity logic
- Optimised for LED horticulture growing The perfect climate control all year round
- Cooling, heating, dehumidifying, circulating and filtering in one device
- Photocell; the photocell automatically activates the cooling mode in the morning and the heating/dehumidifying mode at night
- Simply enter the day and night temperature and RevomaxII will do the rest; it doesn't get easier
- The quietest system available
- Relatively low energy consumption
- Dehumidifying possible day and night
- Adjustable cooling input
- Ceramic heating + heat pump mode heating
- Built-in temperature and water leakage safety switch optional
- Clear and detailed remote control
- Could be remote controlled by WIFI or LAN
- Fire-safe!
- Pre-heat function
- Slow cool-down function
- Alarm log function
- Invisibly concealed
- Deep cooling possible, temperatures below 10°C

REVOMAXII

SPECIFICATIONS

Art.	Type	Voltage	Phase	Absorbed power	Capacity	Dehumidifying Power L/24h *	Water consumption L/min	Heating	Dimensions (cm)	Weight
1-7402	6000 REV2	230V - 400V	1 or 3	1450W	6 kW	93 l/24h	2 - 4	3x1000W	86x48x43	89 kg
1-7403	10000 REV2	230V - 400V	3	2150W	10 kW	116 l/24h	3 - 6	3x1300W	96x56x50	99 kg
1-7404	15000 REV2	230V - 400V	1	3100W	15 kW	182 l/24h	5 - 9	3x2000W	107x66x51	122 kg
1-7405	15000 REV2	400V	3	3100W	15 kW	182 l/24h	5 - 9	3x2000W	107x66x51	122 kg
1-7408	21000 REV2	400V	3	4340W	21 kW	253 l/24h	7 - 13	3x2700W	117x71x56	146 kg
1-7409	30000 REV2	400V	3	6300W	30 kW	347 l/24h	10 - 20	3x2700W	123x90.5x54.5	200 kg
1-7410	30000 REV2 FREE AIR	400V	3	6200W	30 kW	347 l/24h	10 - 20	3x3000W	122.5x83x54.5	206 kg
1-7412	45000 REV2 FREE AIR **	400V	3	9300W	45 kW	546 l/24h	15 - 30	3x3000W	123x90.5x54.5	290 kg

* All values are calculated at 27° Celcius and a base humidity of 60%. Actual results may vary based on circumstances.

** Available upon request

OPTICLIMATE WATERCOOLERS

SPECIFICATIONS

COMPACT ULTRA-LIGHT

Art.	Type	Model	Power	Weight	Dimensions(cm)	Noise	Power	#Fans	Water content
1-8011	OC Water Cooler 4,5 kW	1x OC 2000 / 1x OC 3500	4,5 kW	7 kg	650x410x320	28 dB(A)	0,06 kW	1	2 ltr
1-8021	OC Water Cooler 9 kW	1x OC 6000	9 kW	13 kg	1200x410x320	31 dB(A)	0,12 kW	2	4 ltr
1-8041	OC Water Cooler 14 kW	1x OC 10000 / 2x OC 6000	14 kW	19 kg	1750x410x320	33 dB(A)	0,18 kW	3	6 ltr
1-8061	OC Water Cooler 18 kW	1x OC 15000	18 kW	26 kg	1200x810x320	34 dB(A)	0,24 kW	4	8 ltr
1-8073	OC Water Cooler 32 kW	2x OC 15000	32 kW	52 kg	1750x810x320	36 dB(A)	0,36 kW	6	21 ltr

INDUSTRIAL GRADE

Art.	Type	Model	Power	Weight	Dimensions(cm)	Noise	Power	#Fans	Water content
1-8031	OC Water Cooler 12 kW	1x OC 10000 / 2x OC 6000	12 kW	63 kg	1025x933x600	32 dB(A)	0,27 kW	1	6 ltr
1-8051	OC Water Cooler 17 kW	1x OC 15000	17 kW	76 kg	1025x933x600	32 dB(A)	0,27 kW	1	11 ltr
1-8075	OC Water Cooler 32 kW	vertical 2x OC 15000	32 kW	125 kg	1600x983x600	40 dB(A)	0,60 kW	1	21 ltr
1-8074	OC Water Cooler 32 kW	horizontal 2x OC 15000	32 kW	125 kg	1600x1050x943	40 dB(A)	0,60 kW	1	21 ltr



STEADY-STATE CLIMATE SIMULTANEOUS COOLING, HEATING, DEHUMIDIFICATION & AIRFLOW – SEAMLESSLY CONTROLLED. THAT'S COOL!

A stable and precisely regulated climate is essential for successful indoor cultivation. The RevomaxII, equipped with our advanced Infinity DC inverter technology, offers the widest capacity range among all climate control systems. Unlike conventional HVAC units that cannot operate below 60%, the RevomaxII modulates cooling capacity down to 20-30%, preventing unnecessary on-off cycles. This ensures minimal temperature and humidity fluctuations, optimized energy efficiency, and a consistently ideal growing environment—365 days a year

**THE MOST STABLE.
CLIMATE THINKABLE.
GUARANTEED.**

MADE BY



REVOMAX II

SUPERIOR CLIMATE CONTROL
FOR PROFESSIONAL INDOOR GROW ENVIRONMENTS



Engineered & Designed in Holland

opticlimate.com

© 2025 All rights reserved. RevomaxII is Part of

